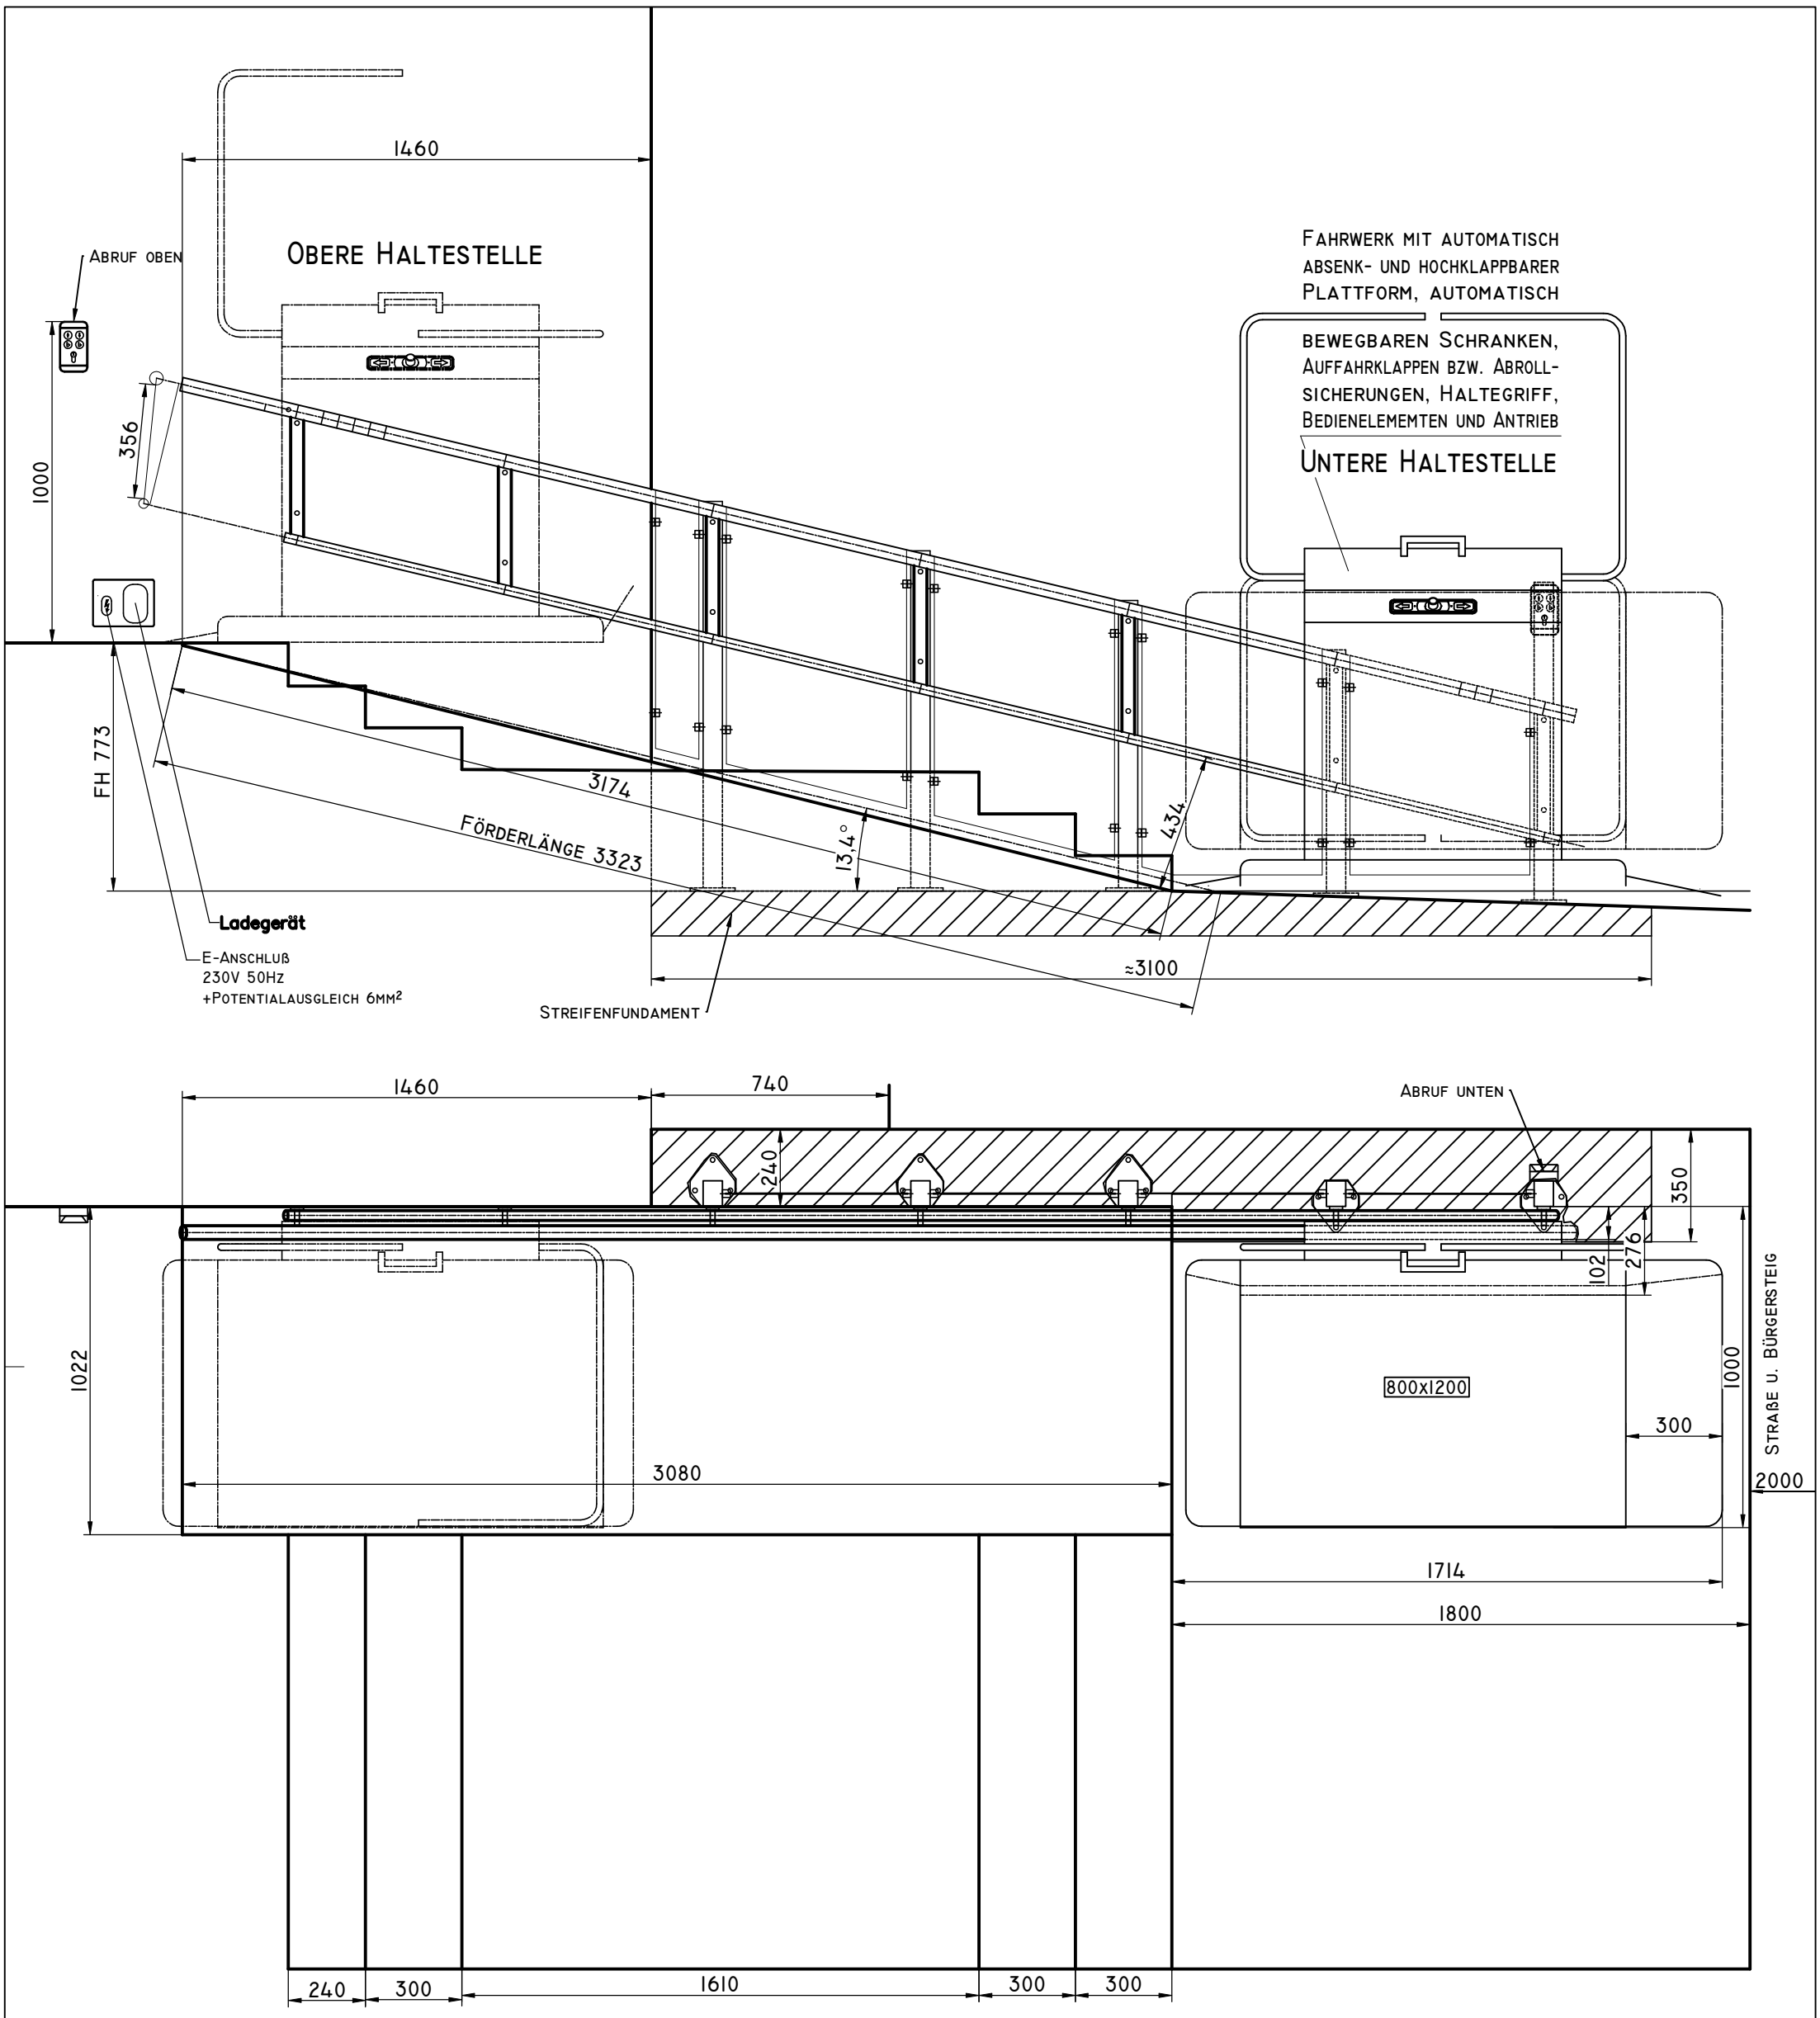

Lift:
GTL20 batteriebetrieben;
Außenanlage;
SPS-Steuerung;
Plattform 800x1200;
bergseitige Klappe 170mm;
talseitige Klappe 170mm;
300kg Nutzlast;
Innensteuerung GI18;
beschichtet RAL7032 ;

Außensteuerung:
2 Stk. Funk-Wandtaster mit Schlüsselschalter - GFA18

Schiene:
4,3 lfm

Stützen:
5 Stk. Stütze 80/60 - Edelstahl und besch. RAL7032

Fahrbahnverkleidung:
2,6 lfm
4 Stk. Blech - Alu 2mm - RAL7032
16 Stk. Blechhalter - Alu - RAL7032

Maßstab:	1 : 20	Format:	A3	Revision:		Datum:	30.09.2024	Gezeichnet:	Herbert Kaineder

Lift: Plattformtreppenlift GTL20
Firma: Högg CH

Adresse:

GANSER LIFTSYSTEME
www.ganserlifte.at

Ganser Maschinen GmbH
Markt 26
A-4171 St. Peter am Wimberg
Tel.: +43 7282-8071
e-mail: office@ganserlifte.at

Copyright protection according to DIN ISO 16016
Passing on and copying of this document, utilization and communication of its contents are prohibited, unless expressly authorized in writing. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent utility model or design.